

# Desktop Power Strip

## AE-PB02GS-53

Desktop power strip 2x Schucko socket, USB port, RJ45 (Ethernet) port, AUDIO output (socket for audio jacks), without the cable, colour of aluminium

## AE-PB02GU-53

Desktop power strip 2x earthed socket, USB port, RJ45 (Ethernet) port, AUDIO output (socket for audio jacks), without the cable, colour of aluminium

## AE-PBU02GS-10/AE-PBU02GS-20

Desktop power strip 2x Schucko socket, 2x USB port, without cable, white/black

## AE-PBU2GU-10/AE-PBU2GU-20/AE-PBU2GU-53

Desktop power strip 2x earthed socket, 2x USB port, power cable with plug, white/black/aluminium

## AE-PBC2GU-53

Desktop extension power strip 2x earthed socket, USB port, RJ45 port (Ethernet), audio output (socket for audio jacks), power cable with plug, colour of aluminium

## AE-PBC3GU-10/AE-PBC3GU-20/AE-PBC3GU-53

Desktop power strip 3x earthed socket, power cable with plug, colour: white/black/aluminium

## AE-PB03GS-10/AE-PB03GS-20/AE-PB03GS-53

Desktop power strip 3x Schucko socket, without cable, white/black/aluminium

## AE-PB03GU-53

Desktop power strip 3x earthed socket, without the cable, colour of aluminium

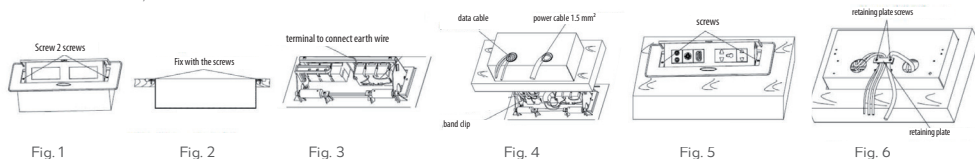


Fig. 1

Fig. 2

Fig. 3

Fig. 4

Fig. 5

Fig. 6



EN


## DIRECTIONS FOR USE

Desktop Power Strip AE-PB02GS-53, AE-PB02GU-53, AE-PBU02GS-10/AE-PBU02GS-20, AE-PBU2GU-10/AE-PBU2GU-20/AE-PBU2GU-53, AE-PBC2GU-53, AE-PBC3GU-10/AE-PBC3GU-20/AE-PBC3GU-53, AE-PB03GS-10/AE-PB03GS-20/AE-PB03GS-53, AE-PB03GU-53

### INSTALLATION STEPS:

1. Unscrew the two indicated screws (fig. 1)
2. Using screws, fix a bottom part of the case in the prepared place (acc. to the figure with dimensions), e.g. in the desktop (fig. 2)
3. In the product version without the power cord, connect the power cable 3 x 1.5 mm<sup>2</sup> (incl. earth wire) to power outlets, the metal case shall be connected to the earth terminal. Cable length shall enable easy opening of the unit (fig. 3)
4. The power strips equipped with data transmission ports and (banana) power sockets shall be connected using flexible cords that are suitable for specific socket type. (Fig 4)
5. Install the unit in the case and secure the screws carefully on both sides (fig. 5)
6. Adjust the length of all cables so that they do not obstruct the power strip opening movement and do not scrape a metal part of the case, locate the retaining plate and secure it with the screws (fig. 6)

### ASSEMBLY DRAWING:

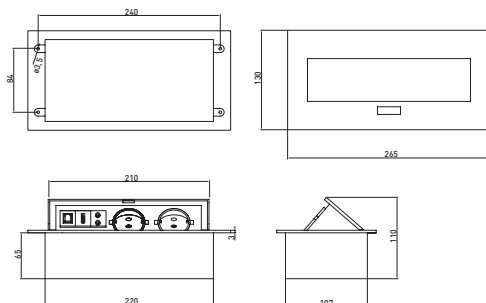

### NOTES:

The product is not resistant to moisture.

For indoor use only.

When the button is pressed the power strip is opening by tilting. Operate the product only when it is open.

The product complies with the requirements of EU Directives and their transpositions into the national law. See the website at [www.gtv.com.pl](http://www.gtv.com.pl) and the Declarations of Conformity for detailed information.